



# NARDI

IMPLEMENT  
FOR PROFESSIONAL  
FARMING



# NSD

Setvospremači  
Seedbed Conditioners




IMPLEMENT  
FOR PROFESSIONAL  
FARMING

 Nardi setvospremači su mašine koje kombinuju različite elemente za obradu zemljišta kao što su valjci, kultivatori, drlače različitih tipova i karakteristika koji svojim istovremenim radom vrše pripremu zemljišta za sadnju i uništavaju korove. Dubina radnih tela podešena je na dubinu vlage u zemljištu kako bi radom omogućila podizanje vlage u više slojeve zemlje čime se obezbeđuje aktivno klijanje zrna. Dobro pripremljena posteljica ima relativno čvrst površinski sloj koji zadržava vlagu blizu površine. Ovakva priprema proizvodi tanak sloj fino usitnjene zemlje koja zagrće zrno i daje prednost biljnim kulturama u odnosu na korove.

 Nardi seedbed preparation machine combine a spring tooth harrow with a packer in order to stir the soil and pack the seedbed at the same time. The harrow is set to a soil depth where moisture is located (if not too deep) to bring up the moisture and kill weeds and then the packer firms the soil and allows the soil moisture to stay near the surface where it is available for seed germination. The ideal seedbed is uniformly firm, has soil moisture near the surface, is free from competing vegetation and is well-packed underneath with small surface clods or a light mulch of residue to prevent soil erosion.

Dupli valjak nošen na gredi. Otporan na jake udarce od grudvi i kamenja.

Double roller mounted on single frame. Resistable for higher strength and resistance to damage from stones.

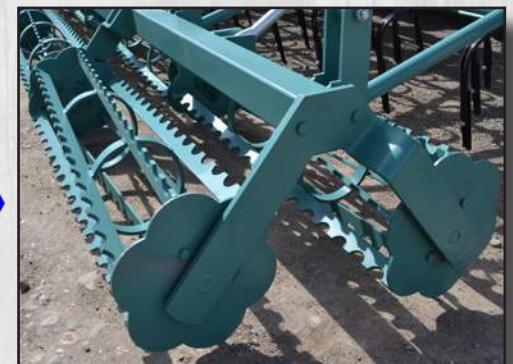

Podesiva suspenzija.  
Adjustable spring support.

Pojedinačni hidraulični cilindar za sklapanje.  
Single hydraulic circuit for folding the booms.






IMPLEMENT  
FOR PROFESSIONAL  
FARMING

Opruga za amortizaciju prelaza preko neravnina koja je otporna na lom.

Spring-cushione rels. Provide suspension and resistance from breakage.

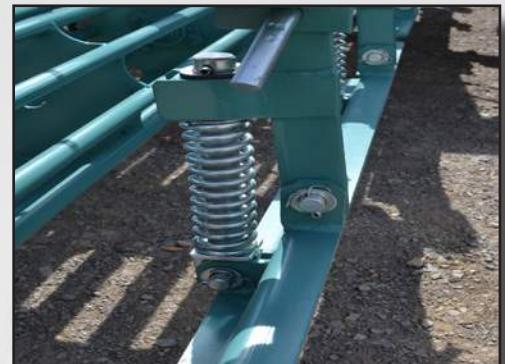

Kačenje u tri tačke, bolcna I kategorije.  
Mounted on three hich point I category.



Prednji valjak kačen na gredi podržan oprugama.

Front roller mounted down single frame supported by springs.



 Elastične motičice postavljene su na 5 linija na razmacima od 5cm. Motičice su nošene na 4 fleksibilna rama kako bi se obezbedilo bolje prijajanje tlu. Kontrola nad dubinom rada kontrolisana je prednjim valjkom i uz pomoć dva zadnja valjka. Ovaj tip motičica garantuje duboko kultiviranje i izbegava vađenje grudvi u vlažnom zemljištu. Ovo oruđe ima dva nosača koja su postavljena pre i posle valjka.

 The 32x10 elastic pawls are spread over 5 lines, 5cm far from each other. The pawls are assembled on 4 flexible frames in order to ensure more adaptability to the soil. The control over the working depth is ensured by a 40mm cage front roll and by two 300mm pronged rolls. This kind of pawls can guarantee a through cultivation and it avoids the extraction of humid substrates. The machine has two level bars, which are placed before and after the front roll.



IMPLEMENTES  
FOR PROFESSIONAL  
FARMING

Model	Radna širina Working width (mm)	Dimenzija u transportu Transportation (mm)	HP	Kg
NSDR 2	2000	2500	45-75	790
NSDR 2.5	2500	2500	55-105	821
NSDR 3	3000	2500	65-115	872
NSDHF 4	4000	2500	85-140	1200
NSDHF 5	5000	2500	95-155	1552
NSDHF 6	6000	2500	105-175	1955

