



# NARDI

IMPLEMENTS  
FOR PROFESSIONAL  
FARMING




## ATOM-T


 Vučeni Atomizeri  
 Trailed Mist Blowers



# NARDI

IMPLEMENTS  
FOR PROFESSIONAL  
FARMING

 Nardi vučeni atomizeri namenjeni su potrebama u poljoprivrednoj proizvodnji. Ove specijalno dizajnirane mašine pružaju najbolju hemijsku zaštitu u vinogradima i voćnjacima, zahvaljujući nizu tehničkih inovacija koje poseduju kao što su kompjuterska kontrola prskanja, ravnomeran i precizan raspored tečnosti po tretiranoj površini. Nardi atomizeri proizvedeni su sa velikom pažnjom prema životnoj okolini i korisnicima ovih oruđa i u ove svrhe proizvodi se širok asortiman različitih atomizera kapaciteta rezervoara od 600 do 3000L sa najkvalitetnijim komponentama koji ispunjavaju očekivanja i najzahtevnijih kupaca.

 Nardi trailed mist-blowers are highly specialized implements intended for agricultural use. They are special designed in order to provide the very best chemical protection in orchard and vineyard crop production, thanks to a series of technical innovation such as computer control of spraying, precise and adjustable distribution of liquids. Nardi produce the implements to a great care of environment and users of products and in this purpose have large number of different mist blowers with tank capacities ranging from 600 to 3000L, with best quality components which, with their wide range of use, can meet the expectations of even the most demanding users.



Vučeni atomizer sa deflektor panelom (opciono)  
Trailed mist blower with deflector (optional)

## STANDARDNA OPREMA - STANDARD FEATURES



Membranska pumpa  
Diaphragm pump



Kontrola pritiska ALPHA 2  
Control unit ALPHA 2



Filter za samopunjenje  
Intake filter



Točkovi  
Tyres




Fiksna ruda  
Fix rod




# NARDI

IMPLEMENTS  
FOR PROFESSIONAL  
FARMING

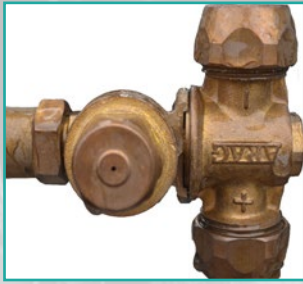

Duple mesingane mlaznice  
Double brass nozzles

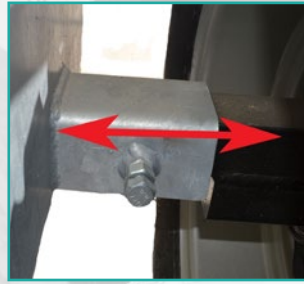

Osovina podesiva po širini  
Width adjustable axle



Difuzorski sklop  
Fan unit



Reduktor sa dve brzine  
Gearbox with two gears



Rezervoar za pranje sistema  
Circuit washing tank



Rezervoar za pranje ruku  
Hand washing tank




Sitasti filter  
Stainer filter



Hidromešač  
Hydraulic agitator

## OPCIONA OPREMA - OPTIONAL EQUIPMENT

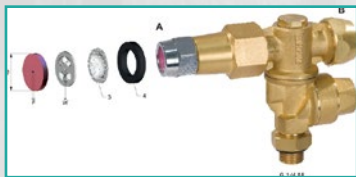

Top dizna  
Top nozzle



Elektronska komandna grupa  
Electronic control unit



Motalica za crevo  
Hose reel



Kardansko vratilo  
PTO Shaft



Sistem za samopunjenje  
Self filling kit



Klipna pumpa YA150  
High pressure piston pump YA150




Klipna pumpa YA75  
High pressure piston pump YA75



Okretna ruda  
Steering rod



Pištolj za prskanje sa  
"Turbo" rasprskivačem  
Spray gun with  
"Turbo" nozzle head

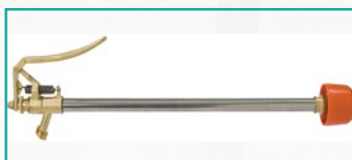

LA 600  
LA 600



Linijski mesingani filter  
Line filter brass



Kompjuter Bravo180  
Computer Bravo180



Zaštitnik za lišće  
Leaf protection



Tripleks dizne  
Trijet brass nozzles



# NARDI

IMPLEMENTS  
FOR PROFESSIONAL  
FARMING

Dif. sklop Ømm Fan Ømm	Litara -Litres
700	600
	800
800	600
	800
	1000
	1500
	2000
900	1000
	1500
	2000
	3000

### Opciona oprema - Optional equipment

Pumpa APS 121 umesto pumpe APS 96 - Pump APS 121 instead of pump APS 96
Pumpa APS 145 umesto pumpe APS 121 - Pump APS 145 instead of pump APS 121
Klipna pumpa YA75 - High pressure piston pump YA75
Klipna pumpa YA150 - High pressure piston pump YA150
El. komandna grupa sa kontrolnom kutijom - El. control unit with box control
Elektronska komandna grupa sa kompjuterom Bravo 180S Electronic proportional unit with computer Bravo 180S
Fontana od nerđajućeg čelika za topljenje praha Stainless steel hydraulic powder mixer
Fontana za topljenje praha sa mlaznicom za pranje boce - Bottle washing device
Sistem za samopunjenje 5m sa korpom Ø40 - Self filling kit 5m with basket Ø40
Sistem za samopunjenje 5m sa korpom Ø50 - Self filling kit 5m with basket Ø50
LA600 - LA600
Pištolj za prskanje za "Turbo" diznom - Spray gun with "Turbo" nozzle head
Tripleks mesingane mlaznice - Trijet brass nozzles
Unutrašnja mlaznica za pranje rezervoara - Internal nozzle for tank washing
Deflektor panel H-160 - Deflector panel H-160
Deflektor panel H-200 - Deflector panel H-200
Stepenik za lakše punjenje rezervoara (sklapajući) Stair for easier filling tank (folding)
Fleksione opruge (1500-2000L) - Flexion suspension (1500-2000L)
Fleksione opruge (3000L) - Flexion suspension (3000L)
Okretna ruda - Steering rod
Potporna noga sa točkicama 600-800-1000L Adjustable supporting foot 600-800-1000L
Potporna noga sa točkicama 1500-2000-3000L Adjustable supporting foot 1500-2000-3000L
Motalica za crevo - Hose reel
Crevo od 60 bara - 60 bar hose
Mehaničke kočnice (1500, 2000, 3000L) - Mechanical brakes (1500, 2000, 3000L)
Kardan sa homokinetičkim zglobom - PTO Shaft sin. cr. omninetic
Set branika - Bumper kit
Štitnik za lišće 1040x270 - Leaf protection 1040x270
Mesingani linijski filter (obe strane) - Line filter brass (both sides)
Svetlosno signalna homologacija - Kit lights
Gumena spojnica (opciono za Ø700 i Ø800) - Rubber clutch (optional Ø700 and Ø800)



Model Model	Kapacitet rezervoara (L) - Tank capacity (L)			Dim. - Size Točkovi Tyres	Kg	Šir. (cm) W (cm)	Duž. (cm) L (cm)	Vis. (cm) H (cm)
	Glavni rezervoar Main tank	Rezervoar za pranje ruku Hand washing tank	Rezervoar za pranje sistema Circuit washing tank					
600	600	20	61	11.5/80 R15.3	290	110	300	120
800	800	20	75	11.5/80 R15.3	390	117	330	130
1000	1000	20	98	11.5/80 R15.3	480	120	350	135
1500	1500	20	130	11.5/80 R15.3	600	135	380	145
2000	2000	20	145	11.5/80 R16	650	150	350	140
3000	3000	20	155	11.5/80 R16	730	168	378	150

### Standardna oprema - Standard features

Toplocinkana šasija - Hot-dip galvanized steel frame
Polietilenski rezervoar sa ventilom za totalno pražnjenje - Polyethylene tank designed for total drainage with screw-lid
Sitasti filter ispod poklopca - Strainer filter located under the lid
Spoljni nivokaz - External liquid level indicator
Usisni filter sa ventilom za samopunjenje - Suction filter with valve for self-filling
Rezervoar za pranje ruku i sistema - Hand and circuit washing tank
Hidromešač - Hydraulic agitator
Membranska pumpa sa kontrolom pritiska ALFA 2 - Diaphragm pump complete with single-level pressure control unit ALFA 2
Osovina podesiva po širini - Width adjustable axle
Propeler sa podesivim nagibom - Polypropylene propeller with adjustable pitch
Duple mesingane mlaznice - Double brass nozzles
Prenos preko reduktora - Gearbox transmission
Fontana za topljenje praha - Powder mixer
Gumena spojnica (standardno za Ø900) - Rubber clutch (standard for Ø900)
Stepenik za lakše punjenje rezervoara (fiksni) Stair for easier filling tank (fix)

Dif. sklop Ømm Fan Ømm	Broj lopatica N° Blades	Brzina Speed	Broj mlaznica N° Nozzles	Kvačilo Clutch	KS - HP	Domet u stranu (m) Side range (m)	Domet u visinu (m) Vertical range (m)
600	8	1	8-10	Ne - No	35-45	4-5	3-4
700	8	1	8	Ne - No	40-50	5-6	4-5
700	8	2	10	Ne - No	60-70	6-7	5-6
800	8	2	10-12	Da - Yes	70-80	7-8	6-7
900	10	2	12	Da - Yes	80-90	8-9	7-8

NARDI BALKAN

Šumadijska 6/2  
12000 Požarevac  
Tel./Fax: +381 12 55 55 48  
Mob: +381 69 10 222 53  
E-mail: office@nardibalkan.com  
www.nardibalkan.com

# NARDI